


1800 / 1850

ODOR CONTROL SYSTEMS

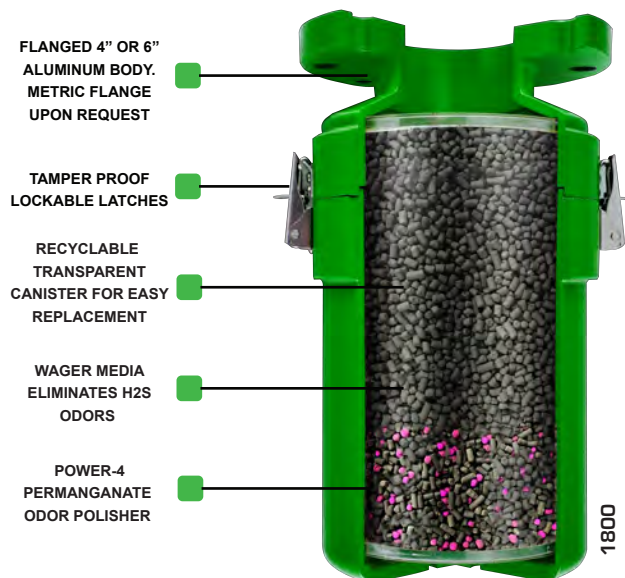

The 1800 Odor Control Vent Valve connects to a candy cane style pipe, and is designed to allow for ventilation in the open position. The valve body may be easily disassembled with two quick release lockable metal latches.

The interior of the body contains a clear canister filled with 12 LBS (5.5kg) of odor scrubbing media. All our units contain our highly effective media that scrub H₂S plus our custom Power-4 permanganate as a polisher. Pellets are non-toxic and landfill disposable. Wager recommends disposing the media in accordance to the local, state, and federal guidelines


This unit is designed to be used with small lift stations or gravity lines. It is not designed to be used with air release valves.

The 1800 is cast in 356-T6 aluminum with an epoxy powder coated finish. It is available in both standard 4" or 6" with a option of a metric flanged end connection.



A vertically mounted 1800, with rain shield is also available to protect the media from water damage in any rain event. Request part number 1800-R.

The 1850 is a combined odor control vent valve, with the additional feature of a ball check to prevent water from submerging the media bed, as well as prevent inflow of flood waters into the lines

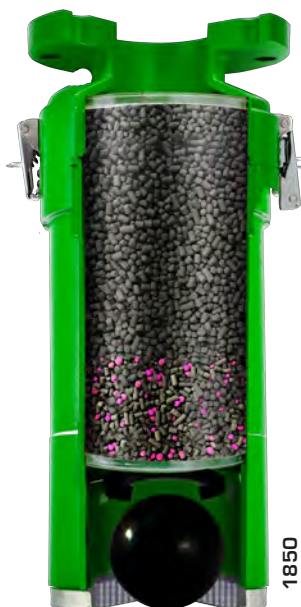

SPECIFICATIONS

4-1800 FAPC	MEDIA CAPACITY Est. 12 LBS. (5.5kg)	1 CANISTER	0 INTAKE VALVES	0 MIST PADS	EST CFM. 5-15
6-1800 FAPC	MEDIA CAPACITY Est. 12 LBS. (5.5kg)	1 CANISTER	0 INTAKE VALVES	0 MIST PADS	EST CFM. 5-15
4-1850 FAPC	MEDIA CAPACITY Est. 12 LBS. (5.5kg)	1 CANISTER	0 INTAKE VALVES	0 MIST PADS	EST CFM. 5-15
6-1850 FAPC	MEDIA CAPACITY Est. 12 LBS. (5.5kg)	1 CANISTER	0 INTAKE VALVES	0 MIST PADS	EST CFM. 5-15



WAGER
C O M P A N Y

www.wagerusa.com
336.9696909
LWager@wagerusa.com
Mpowers@wagerusa.com