

2050-100-SA

ODOR CONTROL SYSTEMS



570 MONTROAL RD, RURAL HALL, NC 27045
(336) 969-6909 • 1-800-562-7024 (US) • WWW.WAGERUSA.COM


2050-100-SA

ODOR CONTROL SYSTEMS

The 2050-100 Odor Control Valve is designed to allow for ventilation and odor control at lift stations, wet wells, vaults containing ARV's and forced mains flowing into gravity fed lines. The valve is constructed from aluminum, and is epoxy coated for protection from the harsh outside environment. Each valve contains (2) 50lb (23kg -1.5 cu.ft) canisters of Wager odor scrubbing media plus our custom Power-4 permanganate as a polisher. A mist eliminator pad is incorporated into the unit to prevent damage to the media bed from moisture.

The 2050-100 contains (2) check valves that allow for fresh air intake directly in the lines or tank without any restrictions from the unit's media bed. Optional caps may be provided if fresh air intake is not required.

The 2050-100 fits beautifully into residential as well as commercial locations. Each vent has louvered covers to allow for maximum air flow of deodorized air. Every vent is equipped with lockable latches to prevent tampering. Available as a vertical mount, or with a side access

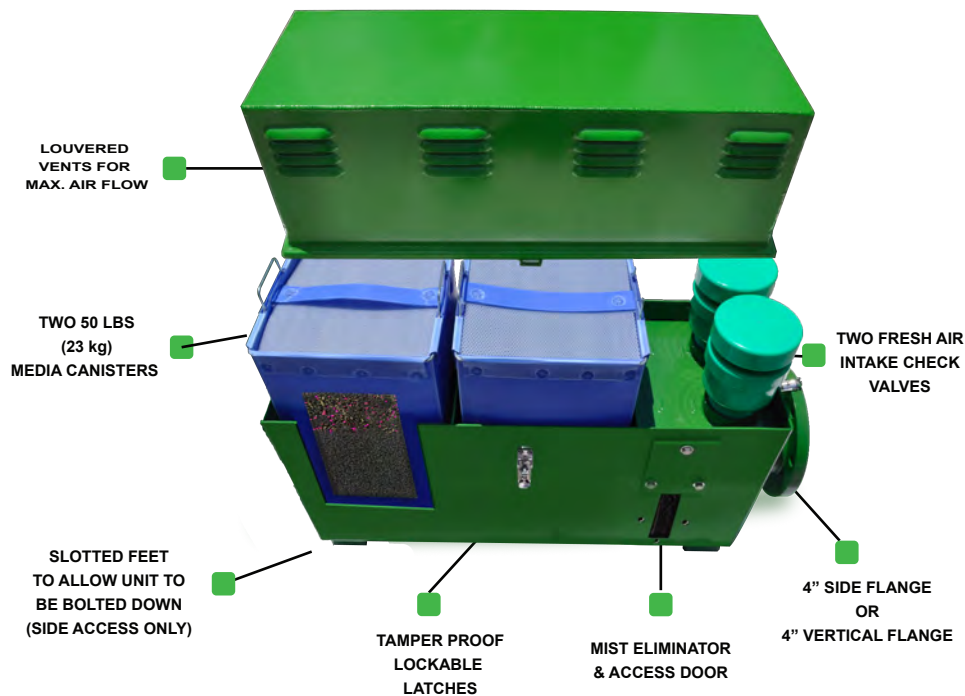


SPECIFICATIONS

4-2050 FAPC-IWS-100	VERTICAL MOUNT	MEDIA CAPACITY Est. 100 LBS. (23kg)	1 CANISTER	2 INTAKE VALVES	1 MIST PADS	EST CFM. 120-150
4-2050 FAPC-IWS-100S	SIDE ACCESS	MEDIA CAPACITY Est. 100 LBS. (23kg)	1 CANISTER	2 INTAKE VALVES	1 MIST PADS	EST CFM. 120-150




www.wagerusa.com
336.9696909
LWager@wagerusa.com
Mpowers@wagerusa.com

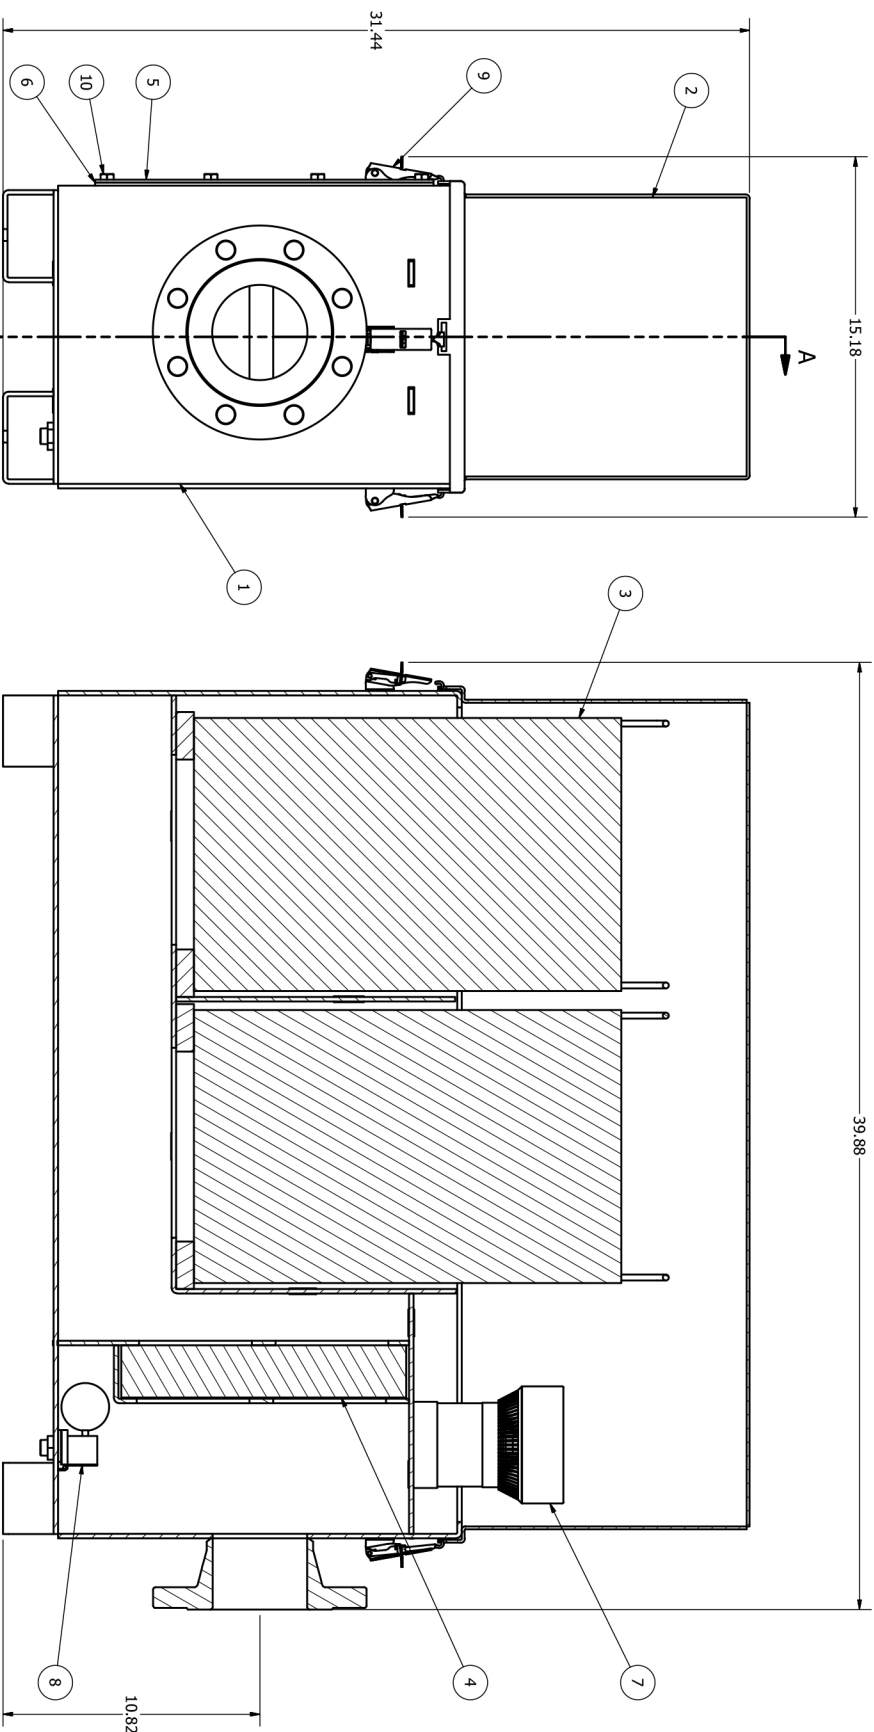

SECTION A-A
SCALE 1 / 4

* 4" MODEL SHOWN, AVAILABLE IN 2" - 6"

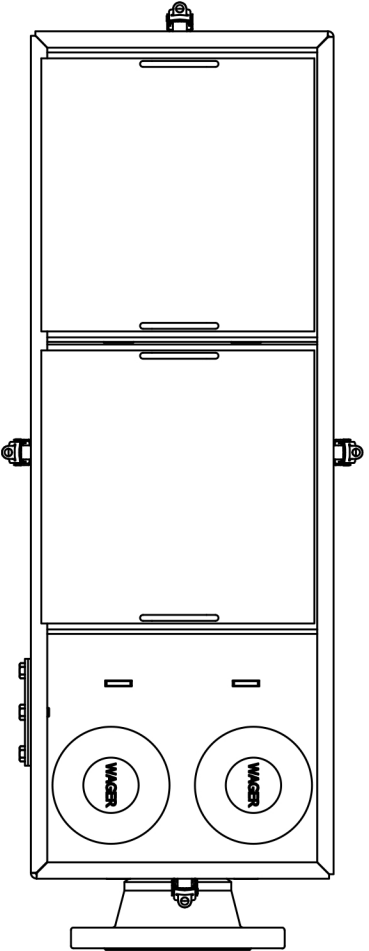

PARTS LIST			
ITEM	QTY	PART NUMBER	DESCRIPTION
1	1	2050-100-SA-SET	SEWER VENT, IWS
2	1	AAU-100-SA-COVER	TOP COVER, SA
3	2	PAEM-2050-50	MEDIA CARTRIDGE
4	1	1000 ACPM	WATER SEPARATOR PAD
5	1	AAU-50-7	PAD COVER
6	1	AAU-50-7-G	PAD COVER GASKET
7	2	VRV-2050	VACUUM RELIEF VALVE
8	1	WS-DRAIN-ASSY	BOTTOM DRAIN
9	4	SV-LATCH	COVER LATCH
10	6	BOLT-3/8-1	PAD COVER BOLTS

DRAWN	Shady	11/1/2016
CHECKED		
QA		
MFG		
APPROVED		

TITLE
SIDE ACCESS SEWER VENT, ODOR
CONTROL W/ INTAKE AND WATER
SEPARATOR, 100 LBS. MEDIA

ROBERT H. WAGER CO., INC.

SIZE	C	DWG NO	4-2050FAPC-IWS-100S	REV	
SCALE	1 / 4	SHEET 1 OF 1			

2050-100-SA

SPECIFICATIONS

- A. This specification defines the requirements for a Wager 2050FAPC-100-SA manufactured by Wager Company in Rural Hall, NC.
- B. The 2050FAPC-100-SA consists of dry-scrubbing media contained in a fabricated aluminum plate housing, powder coated, grass green with a 4" or 6" inlet.
- C. The 2050FAPC-100-SA shall contain 100 lbs of dry-scrubbing media that is engineered for the removal of H₂S gas. The media is contained in two corrugated plastic container that is 11" x 18" in size.
- D. The airflow shall be designed for passive applications. The configuration shall be arranged so that the contaminated air shall flow from the bottom flange and be forced upward through the media bed and discharged through ventilated openings.
- E. The 2050FAPC-100-SA contains TWO air admittance valves. They allow for up to 400 CFM of fresh air to intake directly into the lines without any restrictions from the unit's media bed. This assures continued airflow during pumping sequences needed with air release valves, and also with a vacuum sewer system where outside fresh air is required for system operation.
- F. All components of the 2050FAPC-100-SA shall include:
- 1 A fabricated aluminum plate body, powder coated grass green
 - 2 100 lbs of odor controlling media engineered in pellet form
 - 3 4" or 6" flanged connection – Optional metric flange
 - 4 Tamper proof lockable hook and security latches
 - 5 Disposable media corrugated plastic insert
- G. Vent Scrubber Material
1. Fabricated Aluminum plate
 2. Two corrugated plastic canister measuring 11 ½" x 18"
 3. Latches in 316SS
 4. Hooks in 316SS
 5. 100 lbs of odor controlling media designed for removal of H₂S gas
 6. 4" or 6" flanged connection with 7.5" (191mm) bolt circle – Optional metric flange
 7. Plastic vent scrubbers that contain activated alumina media or carbon will not be accepted.
 8. Media must be Non-Hazardous before and after it is spent.
- H. Media Specification
1. Moisture Content: 35% Max
 2. Crush Strength: 35%-70% Max
 3. Abrasion: 4.5% Max
 4. Pellet Diameter: 1/16" – ¼" (1.5mm-6.5mm)
- I. Wager media only will be accepted due to the high level of capacity. No equals will be accepted. Carbon will not be accepted.
- J. Only UL certified media will be accepted in Wager's vent scrubber.
- K. If other media's are used in this unit, it must be designed to be 25% larger with a minimum of 25% additional media.
- L. . The general contractor is responsible for all design cost changes, engineer review time, and testing verification.
- M. Analytical Services:
1. Samples of the media may be analyzed in order to predict the life of the system media at Wager's expense.



WAGER
C O M P A N Y

www.wagerusa.com
336.9696909
LWager@wagerusa.com
Mpowers@wagerusa.com

2050-100-SA

SPECIFICATIONS

N. Built in Water Separator / mist eliminator

1. The body of the water separator is constructed from 50-52 H32 aluminum plate and is epoxy coated for protection from harsh environments.
2. The overall measurements of the unit are 26.25" x 31.25" x 35"
3. 10" flanged threaded aluminum connection provided for attaching to the 2050-1350
4. A Kerick Valve Assembly with float allows for excess accumulated water to be expelled.
5. An inlet stem provides an exit for accumulated moisture from the air release valve.
6. A Nitrile gasket allows for a tight fit of the aluminum plate cover.

O. Mist Eliminators

1. Highest collection efficiency of ANY mesh-type media: 99+% @ 1 μ m.
2. Composite pads of various mesh styles allow for optimization of efficiency, pressure drop, and pluggage resistance.
3. Able to handle the widest range of gas velocities and contaminant levels.
4. High void spaces (94-97%) and the largest fiber diameters contribute to the highest resistance to fouling.
5. Lower pressure drops than traditional knitted mesh.
6. Custom fabrication to conform to any Wager 2050 series.
7. The media is cleanable & reusable for extended service life in the harshest environments.
8. Wide range of materials of construction available, including polypropylene, PVDF, ETFE and PFA, to meet any level of temperature and corrosion requirements.



WAGER
C O M P A N Y

www.wagerusa.com
336.9696909
LWager@wagerusa.com
Mpowers@wagerusa.com

2050-100-SA

INSTALLATION GUIDE



1. Unlatch the lid and remove the lid from the body of the valve. The media canisters are wrapped in plastic for delivery. Remove the wrapped media canisters by lifting up on the handles provided on each of the media canisters.



2. Ensure all of the original plastic wrap is removed from the canisters before reinstalling. Media is in pellet form and should move freely to allow air to vent through. To check the media, pull up on the blue tab on the media canister lid. Check that the media pellets are dry.



3. Reinstall media canisters ensuring they are flush with the valve's inner chamber.



4. Secure the lid with the four lockable latches.



WAGER
C O M P A N Y

2050-100-SA

INSTALLATION INSTRUCTIONS

- Pour a concrete pad with bolts in place for slated feet on the unit.
- If preferred, a level crush stone pad may be used in lieu of concrete.
- Set the 100-SA on pad or stone, and bolt it down.
- Remove media from the unit.
- If the 100-SA is being used in conjunction with an ARV, get a complete blowout of the ARV so that there is no big slug of air through the media bed.
- Unwrap the media canisters and place in the unit.
- Reinstall the 100-SA cover, and lock down.



WAGER
C O M P A N Y

www.wagerusa.com
336.9696909
LWager@wagerusa.com
Mpowers@wagerusa.com

2050-100-SA

REPLACEMENT PARTS LIST

AAU-100-SA-IWS	2050-100-SA BODY
AAU-100-LID	2050-100-SA COVER
VRV-2050	2050 VACUUM RELIEF VALVE
OCU-2050-50	50 LB. CARTRIDGE ODOR CONTROL MEDIA
233-GASKET-3	GASKET, 3.0 "I.D.x 3.5" O.D.
SV- LATCH	UNDER CENTER DRAW LATCH
1000 ACFM	MIST ELIMINATOR PAD
WS-DRAIN-ASSY	WATER SEPARATOR VALVE
AAU-50-7-G	2050 DOOR GASKET



WAGER
C O M P A N Y

www.wagerusa.com
336.9696909
Wager@wagerusa.com
Mpowers@wagerusa.com

2050-100-SA


MAINTENANCE GUIDE



1. Unbolt water separator access plate. Inspect bolts, washers, and gasket. Remove water separator pad.



2. Wash water separator pad with hose.

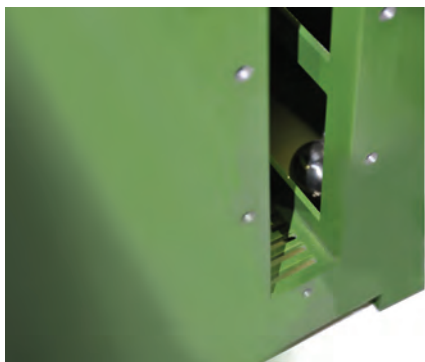

3. With the water separator pad out, inspect float drain assembly. Remove any debris and ensure drain is clean.



4. Reinstall water separator pad and bolt access plate back onto the body.



5. Inspect the media. Make sure it is dry. Shake or stir media pellets inside canisters every 3-6 months for maximum media life.



6. Secure the lid with the four locable latches.



WAGER
C O M P A N Y

2050-100-SA

TEST PROCEDURES




(Example of Side flange procedure.)



(Example of bottom flange procedure.)

1. Place Odor Logger in the bottom chamber of the unit, below the media baskets.

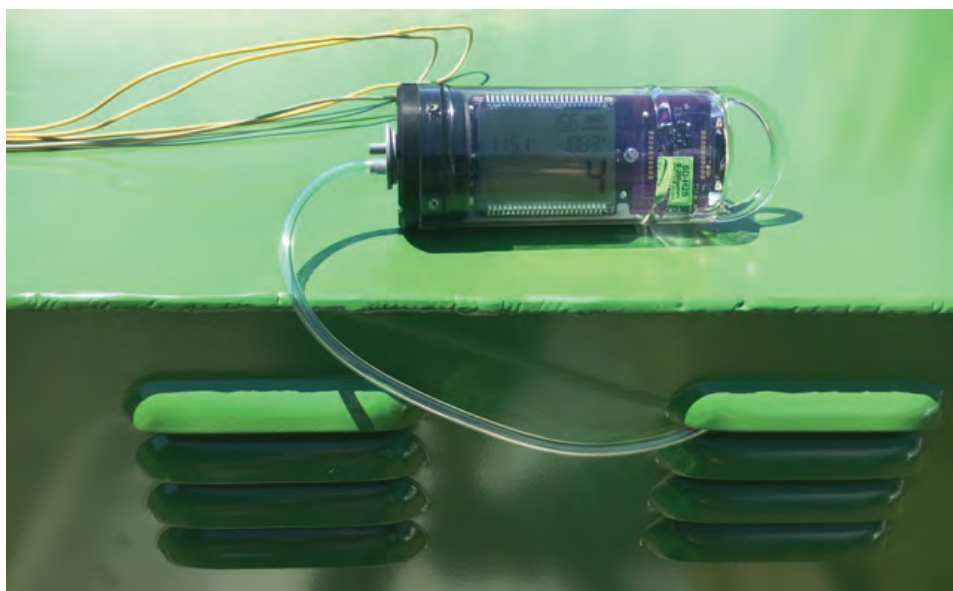

2. Place Odor Logger on top of media baskets, or place tube through the vent louvers.



WAGER
C O M P A N Y

www.wagerusa.com
336.9696909
LWager@wagerusa.com
Mpowers@wagerusa.com

2050-100-SA

MEDIA INDICATOR STICKERS



Replace Filter

Over Exposed

Operating Instructions

- Ensure that packaging pouch is intact.
- Open packaging pouch by tearing off the top part from one of side notches
- Remove indicator sticker from the packaging pouch.
- Peel off the protective liner to expose the bottom adhesive (Figure 1).
- Hold the sticker from the edges, as shown in Figure 2, and place it on center clean area of the filter's outlet with the reading area (glossy surface) of the sticker facing up.
- Press firmly to attach sticker to the filter's outlet (Figure 3).
- Replace filter when the reading area of the indicator changes color to brown or black.

*Caution: Do not touch bottom adhesive or the exposure area.

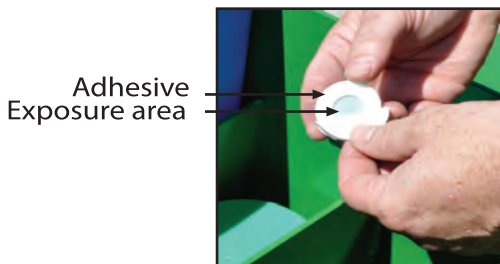


Figure 1



Figure 2




Figure 3



WAGER
C O M P A N Y

www.wagerusa.com
336.9696909
LWager@wagerusa.com
Mpowers@wagerusa.com

WAGER SLATES

WARRANTY ACTIVATION GUIDE

TO ACTIVATE YOUR WARRANTY

- Download the APP on your smartphone or tablet (ios or android) SLATE PAGES
(The Slate Pages LLC)
- Open the APP.
- Create your profile.
- Scan the QR Code on the Wager unit.

UNDER ACTIVATE WARRANTY:

- Tap Activation Date and enter it.
- Tap Contact information and enter it.
- Tap Installation Instructions and review.
- Capture GPS location.
- Capture installation photo (optional)..
- Tap Save (Upper Right Corner).



WAGER
C O M P A N Y

www.wagerusa.com
336.9696909
LWager@wagerusa.com
Mpowers@wagerusa.com