

2050-50-SA


MAINTENANCE GUIDE



1. Unbolt water separator access plate. Inspect bolts, washers, and gasket. Remove water separator pad.



2. Wash water separator pad with hose.

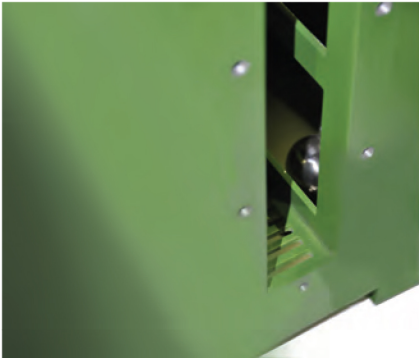

3. With the water separator pad out, Inspect float drain assembly. Remove any Debris and ensure drain is clean.



4. Reinstall water separator pad and bolt access plate back onto the body.



5. Inspect the media. Make sure it is dry. Shake or stir media pellets inside Canisters every 3-6 months for maximum media life.



6. Secure the lid with the four lockable latches.



WAGER
C O M P A N Y